



Company Name: \_\_\_\_\_ Job Site Location: \_\_\_\_\_


Date: \_\_\_\_\_ Start Time: \_\_\_\_\_ Finish Time: \_\_\_\_\_ Foreman/Supervisor: \_\_\_\_\_

**Topic 68: Concrete Waste Management (Part B)**

**Introduction:** Educate all employees, subcontractors, and suppliers on concrete waste management techniques.

**Onsite Temporary Concrete Washout Facility, Transit Truck Washout Procedures:**

- Temporary concrete washout facilities should be located a minimum of 50 ft from storm drain inlets, open drainage facilities, and watercourses. Each facility should be located away from construction traffic or access areas to prevent disturbance or tracking.
- A sign should be installed adjacent to each washout facility to inform concrete equipment operators to utilize the proper facilities.
- Temporary concrete washout facilities should be constructed above grade or below grade at the option of the contractor. Temporary concrete washout facilities should be constructed and maintained in sufficient quantity and size to contain all liquid and concrete waste generated by washout operations.
- Temporary washout facilities should have a temporary pit or bermed areas of sufficient volume to completely contain all liquid and waste concrete materials generated during washout procedures.
- Washout of concrete trucks should be performed in designated areas only.
- Only concrete from mixer truck chutes should be washed into concrete wash out.
- Concrete washout from concrete pumper bins can be washed into concrete pumper trucks and discharged into designated washout area or properly disposed of offsite.
- Once concrete wastes are washed into the designated area and allowed to harden, the concrete should be broken up, removed, and disposed of at the approved waste disposal site. Dispose of hardened concrete on a regular basis.

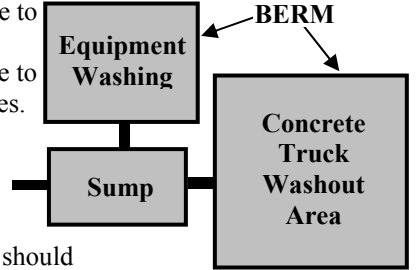

**Temporary Concrete Washout Facility:**

- Temporary concrete washout facility should be constructed as to best management practices (BMP), with a recommended minimum length and minimum width of 10 ft, but with sufficient quantity and volume to contain all liquid and concrete waste generated by washout operations.
- Plastic lining material should be a minimum of 10 mil in polyethylene sheeting and should be free of holes, tears, or other defects that compromise the impermeability of the material.
- **(Above Grade)** Straw bales, wood stakes, and sandbag materials should conform to the straw bale barrier provisions.
- **(Below Grade)** Lath and flagging should be commercial type.



**Removal of Temporary Concrete Washout Facilities:**

- When temporary concrete washout facilities are no longer required for the work, the hardened concrete should be removed and disposed of.
- Materials used to construct temporary concrete washout facilities should be removed from the site of the work and disposed of.
- Holes, depressions, or other ground disturbance caused by the removal of the temporary concrete washout facilities should be backfilled and repaired.

**Inspection and Maintenance:**

- Inspect and verify that activity based BMP's are in place prior to the commencement of associated activities. While activities associated with the BMP are under way, inspect weekly during the rainy season and of two-week intervals in the non-rainy season to verify continued BMP implementation.
- Temporary concrete washout facilities should be maintained to provide adequate holding capacity with a minimum freeboard of 4 in. for above grade facilities and 12 in. for below grade facilities. Maintaining temporary concrete washout facilities should include removing and disposing of hardened concrete and returning the facilities to a functional condition.
- Hardened concrete materials should be removed and disposed of.
- Washout facilities must be cleaned, or new facilities must be constructed and ready for use once the washout is 75% full.

**Conclusion:** All equipment and clothing need to be cleaned in a designated area to eliminate contamination of the soil and water.

**Work Site Review**

Work-Site Hazards and Safety Suggestions: \_\_\_\_\_

Personnel Safety Violations: \_\_\_\_\_

**Employee Signatures:** \_\_\_\_\_ *(My signature attests and verifies my understanding of and agreement to comply with, all company safety policies and regulations, and that I have not suffered, experienced, or sustained any recent job-related injury or illness.)*


**Foreman/Supervisor's Signature:** \_\_\_\_\_  
*These guidelines do not supersede local, state, or federal regulations and must not be construed as a substitute for, or legal interpretation of, any OSHA regulations.*